
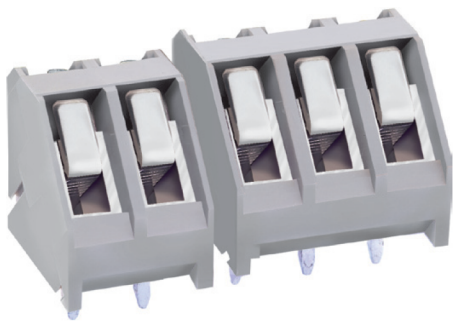


MB223 PCB Terminal Block, Modular

DECA®



DIMENSIONS/POSITIONS

MB223-500M

Pitch	5.00mm	
Poles	2 ~ 3Poles	
Dimension A	5.00mm	
Length	A= 5.00xP(P≥2)	
Housing Material	PA 66	
Cage Clamp	Brass, Tin Plated	
Contact	Brass, Tin Plated	
Screw Thread	M2.6, Steel, Zinc Plated	
Wire Size	12 ~ 24AWG	
PCB Hole Diameter	1.5mm	
Tightening Torque, Max.	3.5 Lb-in	
Operating Temperature	-40°C to +105°C	

TECHNICAL DATA

Connection in acc. with standard EN-VDE		
Nominal Current I _N	10A	
Nominal Cross Section	2.5mm ²	
Maximum load current	10A	
Insulating Material	PA	
Inflammability class acc. to UL94	V0	
Nominal voltage, UL/CUL	300V	
Nominal current, UL/CUL	10A	

