

RoHS
compliant

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE

2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATED: 50u"~100u" NI

CONTACT AREA: 1u"~30u" SELECTIVE AU

SOLDER TAILS AREA: 100u"~200u" MATTE SN

3. SHELL: STEEL




4. RIVET, BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:


1. RATED VOLTAGE: 35V/AC MAX.

17APR2024

POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	INTERFACE DIM. L	PIN NO.

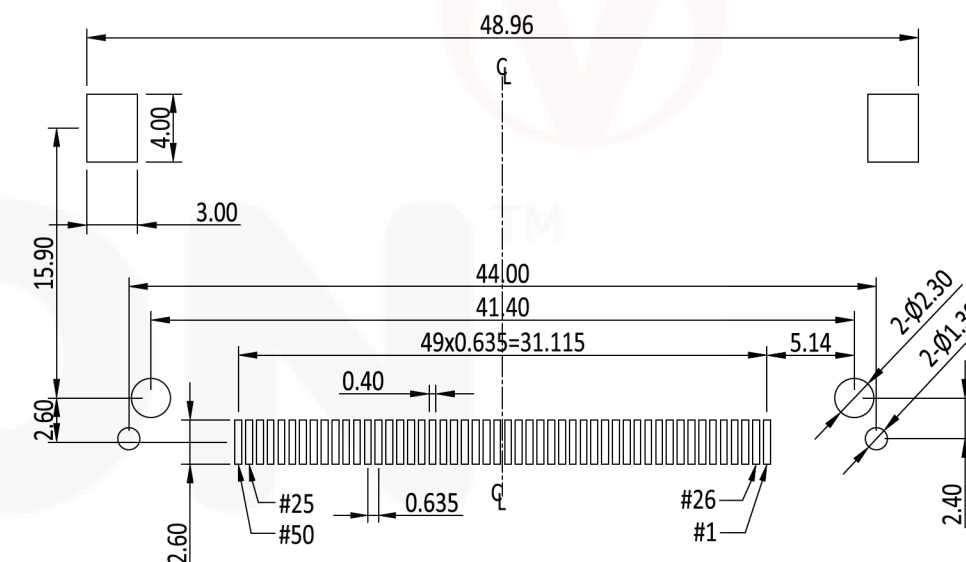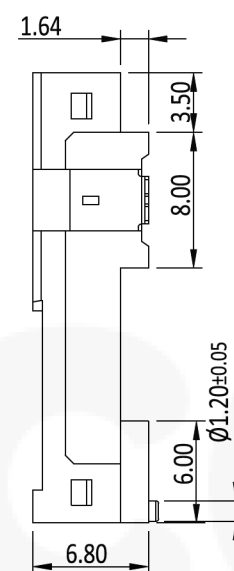

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

2						
1	CFC-1-50-575	CFC-1-50	15u" AU	W/O NUT		
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0 ±0.5 0 ±0.3 0.00 ±0.2		 SIP  Cmk Cpk	TOBY ELECTRONICS LTD sales@toby.co.uk toby.co.uk			
SCALE: AS SHOWN		UNIT: mm	TITLE: CFA TYPE 1 (W/O GROUNDING EXT.) STANDARD TYPE(STANDOFF 1.64)			
DRAWN: XINGRU_LAI		02 Apr 2024				
CHECKED: PEARL_HUNG		02 Apr 2024				
APPROVED: PEARL_HUNG		02 Apr 2024				
		SIZE A4	SHEET 1/1	REV. E	PART NO. CFC-1-50-575	
				CODE: GA		

A	E	ECN-2403082(JOLIN)NEW P/N	27MAR2024
	D	ECN-17100040(QUEENIE)	26OCT2017
	C	ECN-0707244(JOCELYN)	26JUL2007
ZONE	REVISION	DESCRIPTION	DATE