



2.54mm Pitch Value IDC Cable Sockets V101-W-xx-R1 Series

Supplied with strain relief & long polarising bump
RoHS Compliant & UL Approved

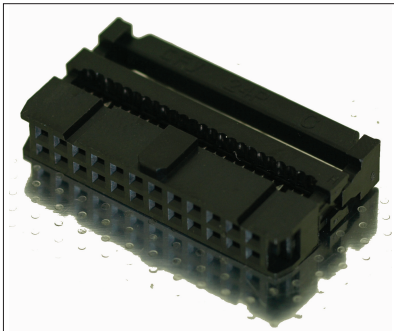

Position	Dimension	
	A	B
08	14.82	7.62
10	17.36	10.16
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

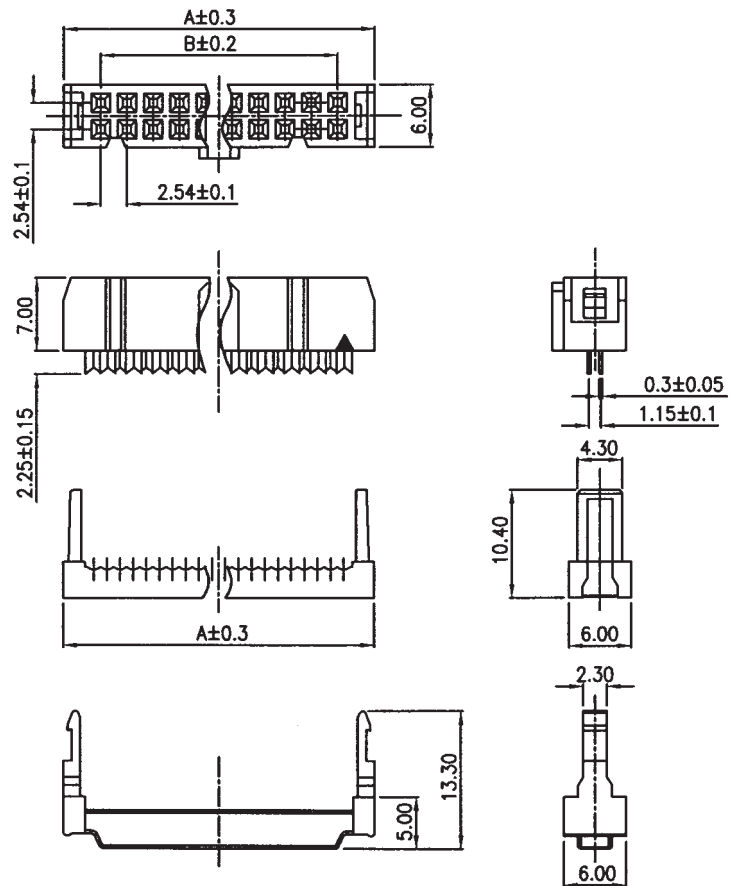

Ordering Information:

V101-W - xx - R1

1

Option 1(xx)

Number of Standard Positions:

06, 08, 10, 12, 14, 16, 20, 24, 26,
30, 34, 40, 44, 50, 60 & 64

Please note - some sizes from the above table
may be subject to MOQ -

Check Stock @ www.toby.co.uk

Specification for V101-W-xx-R1

Insulator Material:	PBT UL94V-0 rated
Contact Material:	Phosphor Bronze
Current Rating:	1A Max.
Contact Plating:	Gold flash over Ni underplate
DWV:	500V AC for 1 minute
Insulation Resistance:	3000M Ω min. @ 500V DC
Contact Resistance:	30m Ω Max.
Operating Temperature:	-40°C to +105°C

Mates with Valcon VFC series IDC cable &
Valcon 301 & 302 series PCB Headers