

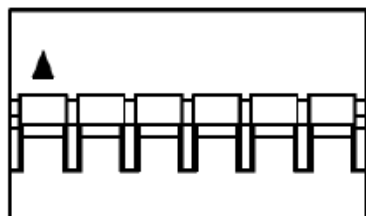


REV	DESCRIPTION	DATE

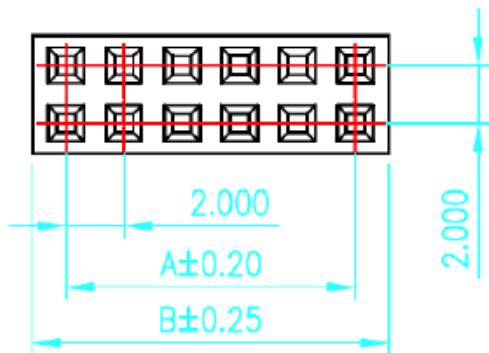

**Features:**

- \* Available in 2X2 through 2X40 Circuits
- \* Material: Nylon66 UL94V-0 15%Glass Fiber
- \* 1950-H04~ 1950-H19  
Accepts YY-1850-T Crimp Terminal  
1950-H20~ 1950-H80
- \* Accepts 1950-T Crimp Terminal
- \* Mates with 1950-WXXS or 1950-WXXR Series Housing

**Ordering information:**

1950-H XX  
I 2

- 1 H=Housing
- 2 No. of Circuits 04~80



Circuits	Dimension mm	
	A	B
2X2	2.0	4.3
2X3	4.0	6.3
A: 2.0 X (Part No. of Pin/2-1) B: 2.3 + A		
2X40	78.0	80.3

TOLERANCE		the vital component			
X.	--	TITLE 2.0mm (.079") Pitch Double Row Housing			
X.X	±0.15				
X.XX	±0.10				
X.XXX	±0.05				
ANGULAR	--				
APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	Terry		1:1	1950-HXX-X-X	AD
CHECKED	Gang				
APPROVED	Song	UNIT	SIZE	DWG NO.	SHEET
		MM	A4	P-1950-H-001	1 OF 1