

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:
ONE PLACE DECIMALS $\pm .1$ [2.54]	THREE PLACE DECIMALS $\pm .005$ [.13]	ANGLES $\pm 5^\circ$	
TWO PLACE DECIMALS $\pm .01$ [.25]	FOUR PLACE DECIMALS $\pm .0020$ [.051]		


NOTES:

1. [] DIMENSIONS ARE IN MILLIMETERS.
2. MADE FROM UL-1213 RATED WIRE, WHICH IS RATED TO 600 VOLTS @ 200° C.

TABLE 1

PART NO.	DIM "A"
JL-100-25-T	.100 [2.54]
JL-250-25-T	.250 [6.35]
JL-300-25-T	.300 [7.62]
JL-400-25-T	.400 [10.16]
JL-500-25-T	.500 [12.70]
JL-600-25-T	.600 [15.24]
JL-1000-25-T	1.000 [25.40]

DO NOT SCALE
FROM THIS PRINT.

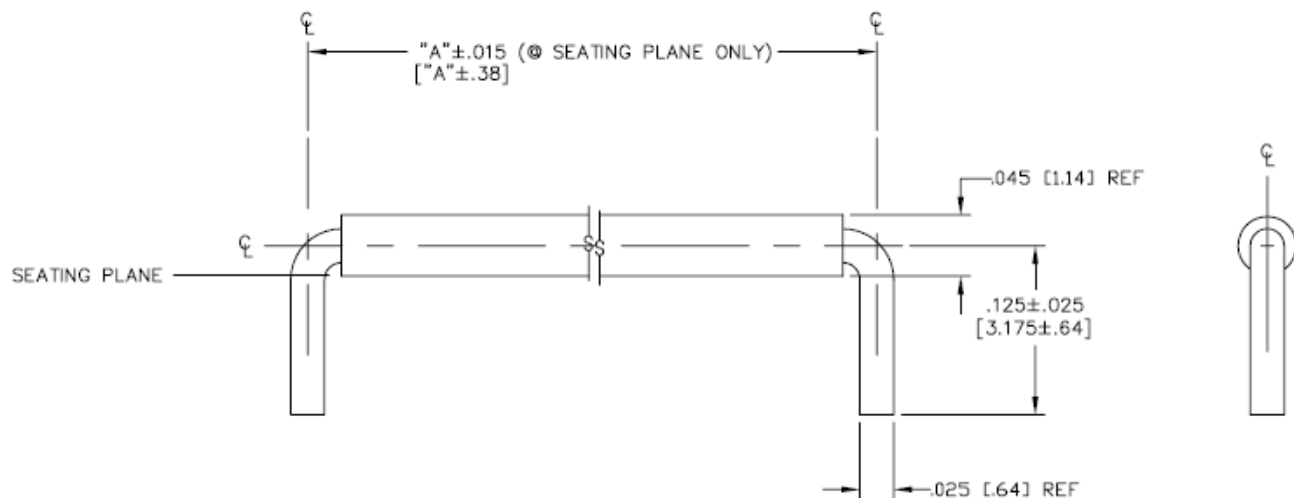

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.



MATERIAL:
INSULATOR:
WHITE TEFLON
UL FLAME TESTED: VW-1
WIRE:
22 GAUGE COPPER
PLATING:
AG PER MIL-QQW-343

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:

TY 1-15-82

EX/SPROD/COMPNT/MISC
JLXXX25TJL-XXX-25-T
SHEET 1 OF 1