

3M™ CF Card Header

CompactFlash™ Type I, Surface Mount



- Meets CFA standards
- Single row solder tails with 0.635 mm spacing
- Board component clearance with 1.64 mm standoff
- Ejector option for easy removal of CF Card
- Retainer clip option permits stability for mobile and high vibration applications
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the "RoHS Compliance" section of www.3Mconnectors.com for compliance information (RIA E1 and C1 apply)

Date Modified: July 25, 2014

TS-0682-D
Sheet 1 of 4

Physical

Insulation

Material: Liquid Crystal Polyester (LCP)

Flammability: UL 94V-0

Color: Beige

Contact

Material: Copper Alloy

Plating

Underplating: 100 μ" [2.54 μm] Nickel

Wiping Area: Gold flash over 80/20 Palladium Nickel, Lubricated (see Ordering Information)

Solder Tails: Gold flash (see Ordering Information)

Marking 3M Logo, Part Number on Ejector Only

Electrical

Current Rating: .5 A

Insulation Resistance: $>1 \times 10^9 \Omega$ at 500 V_{DC}, $>1 \times 10^8 \Omega$ at 500 V_{DC} after Environmental Conditioning

Withstanding Voltage: 500 V_{RMS} at Sea Level

Current Rating: Insulation Resistance and Withstanding Voltage

Environmental

Temperature Rating: -55°C to +85°C

Process Rating: 260°C (per J-STD-020C)

UL File No.: E68080

CompactFlash is a registered trademark of Sandisk Corporation.

the **vital**
component





3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373

3M™ CF Card Header

CompactFlash™ Type I, Surface Mount



Pin Type	Interface Dim A	Pin No.
detect	3.50 [.138]	25, 26
general	4.25 [.167]	all other pins
power	5.00 [.197]	1, 3, 38 & 50

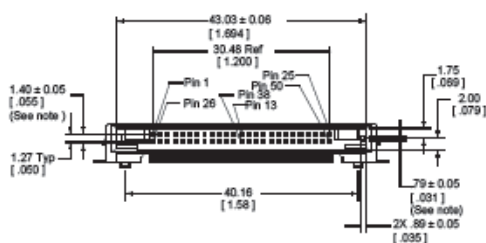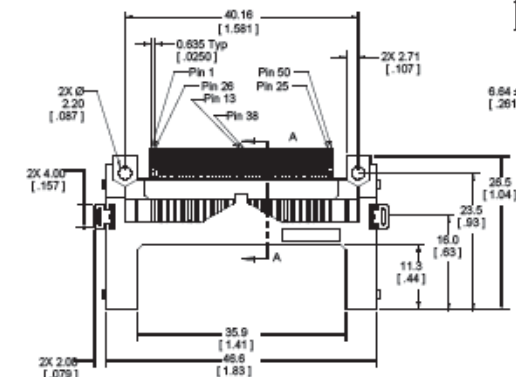

Section A-A



Note: Normal (Option "7") style shown. For Inverse style rotate polarization keys and pin call outs 180°.

mm
[inch]

Tolerance Unless Noted		
	.0	.00
mm	± .3	± .15

[] Dimensions for Reference only

N7E50-X516XX-20-XX (RIA E1 & C1 apply)

Options: CF Card Polarization
7 = Normal
A = Inverse

Options: T&R
WF = 72 mm

Plating:
PG = Au Flash over 25 μ" [0.64 μm] PdNi Lubricated with Au Flash tails
PK = Au Flash over 20 μ" [0.5 μm] PdNi Lubricated with Au Flash tails



TS-0662-D
Sheet 2 of 4

the **vital**
component

3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373

3M™ CF Card Header

CompactFlash™ Type I, Surface Mount

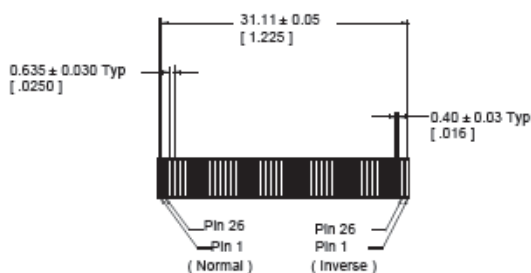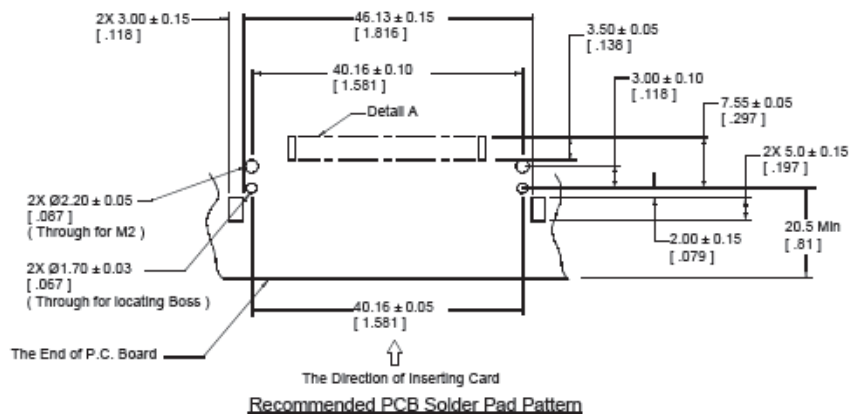

Detail A



TS-0662-D
Sheet 3 of 4

the **vital**
component

3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373

3M™ CF Card Header

CompactFlash™ Type I, Surface Mount

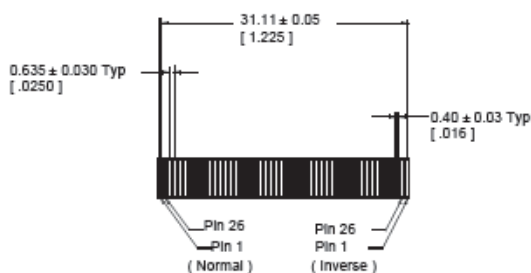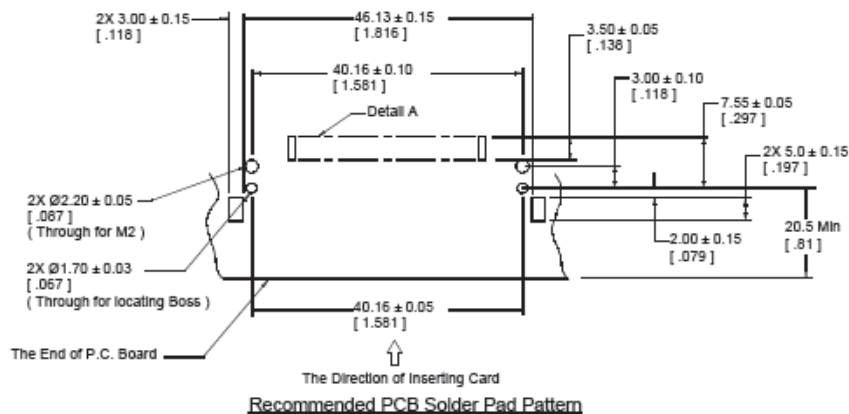

Detail A

TS-0662-D
Sheet 3 of 4

the **vital**
component

3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373