

B28d FEMALE HEADER STRAIGHT

PITCH: 1.27mm * 1.27mm

SPECIFICATIONS








Material

Insulator : LCP, glass reinforced, rated UL 94V-0
Contact : Phosphor Bronze


Electrical

Current Rating : 0.5 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 1000 MΩ min.
Dielectric Withstanding Voltage : 250V AC for 1minute
Operating Temperature : -40°C to +105°C

► Mating Suggestion : C09b, C10b, C11, C11a & C12 series.

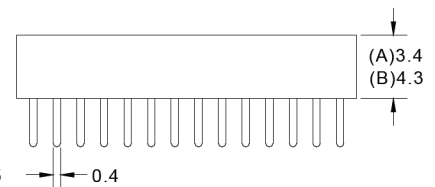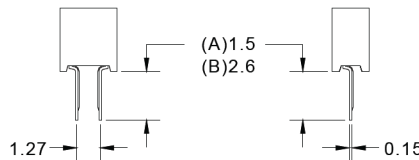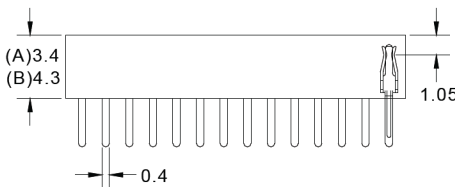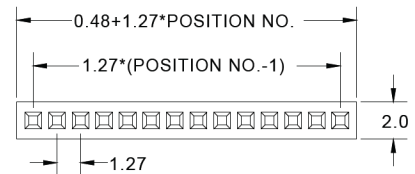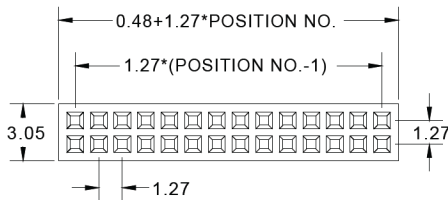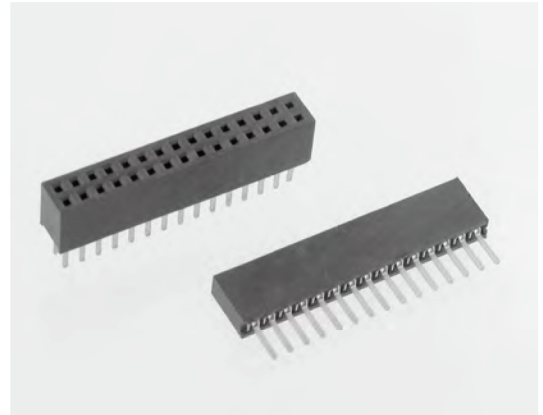


RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

How to order: B28d - 1 - 2 - 3 - 4 - 5 - 6 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR HEIGHT	5. PIN LENGTH	6.INSULATOR COLOR
SINGLE ROW 1*2 - 1*50 DUAL ROW 2*2 - 2*50	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: 3.4mm B: 4.3mm	A: 1.5mm B: 2.6mm	1. BLACK  THE VITAL COMPONENT