



1.27 x 2.54mm Pitch Dual Row Surface Mount Straight PCB Mount Header SPR2-xx-G-xxx-xxx Series

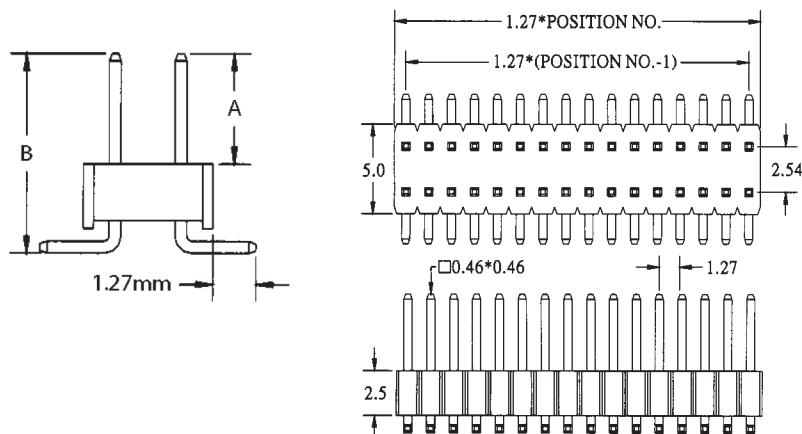

1.27mm Pin Pitch & 2.54mm Cross Pitch
Gold Flash Plated Contacts
From 2x2 to 2x50 Positions



Specification for SPR2-xx-G-xxx-xxx Series

Contact Material:	Brass
Contact Plating:	Gold Flash Plated
Body:	GFP UL94V-0 Rated Black
Rated Current:	1A - DWV - AC500V
Insulation Resistance:	5000 M Ω Max.
Operating Temperature:	-40°C to +105°C

Ordering Information for SPR2-xx-G-xxx-xxx Series

SPR2 - xx- G - 058 - 097

1 2 3

- Option 1 *Total number of contacts*
04 (2x2) to 100 (2x50)

- Option 2 *Contact Pin Dimensions (see above)*
A (058) = 5.84mm
Other Pin lengths available - Please contact us

- Option 3 *Overall Pin Dimensions (see above)*
B (097) = 9.65mm
Others Pin lengths available - Please contact us

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities.



Tel: 01295 271777 Fax: 01295 271744 Web: www.toby.co.uk email: sales@toby.co.uk