

ML250 Series 2.50mm Headers



- Straight & Right Angle Locking Headers
- Mates with ML250-xx-H Series Housings & Crimps


How to Order - (2.50mm Locking Headers)

ML250 - 02 - S - 010

1 2

OPTION 1 Number of Contacts: 02 - 20

OPTION 2 Type: S = Straight R = Right Angle

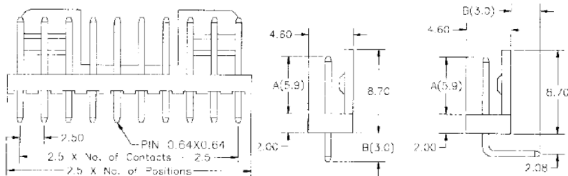

Specification (UL File Number E159535)

Current Rating:	3 Amp AC/DC
Voltage Rating:	250V AC Max.
Insulator Resistance:	1000 Megaohms min.
Withstanding Voltage:	1000V AC (r.m.s.) 1 minute
Operating Temperature:	-25 ~ +90 Deg. C
Contact / Plating Material:	Copper Alloy / Tin Plating
Housing Material:	White Nylon (UL 94V-0)

