





(1.27 mm) .050"

FFMD-20-T-02.00-01-N-R

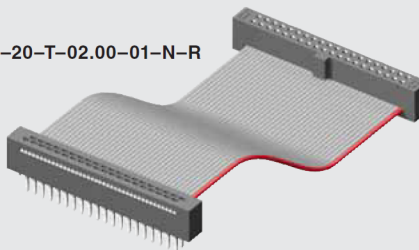

FFMD-10-S-10.00-01

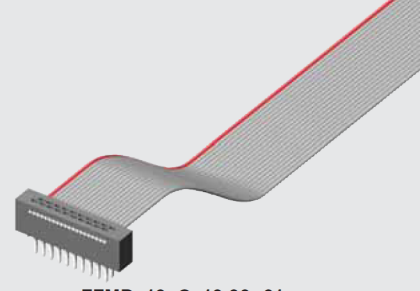

FFMD SERIES

TIGER EYE™ FLAT IDC WIRE CABLES

Mates with:
FLE*, SFMC*,
 Transfer End Option
 Mates with: **FTS, FTSH,**
EHF, SHF, ESHF

SPECIFICATIONS

Insulator Material:
 Black Glass Filled Polyester
Terminal:
 Phosphor Bronze
Contact:
 BeCu (-T)
Plating:
 Sn over 50 μm (1.27 μm) Ni
Wire: 30 AWG
Current Rating:
 2.5 A per pin
 (1 pin powered)
Operating Temp Range:
 -40 °C to +105 °C
Voltage Rating:
 215 VAC
 304 VDC
RoHS Compliant:
 Yes

RECOGNITIONS



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- Other sizes
- Contact Samtec.

***Note:** Standard FFMD callout will not mate with FLE, SFMC. Must use gold plated callouts. (See drawing on web.)
 When mated with a socket,
 Wire 1 mates with Pin 2;
 Wire 2 mates with Pin 1, etc.

Note: This Series is non-standard, non-returnable.

TYPE STRIP	NO. PINS PER ROW	END OPTION	OVERALL LENGTH	01	TRANSFER OPTION	OTHER OPTION
	-04, -05, -08, -10, -13, -17, -20, -25 (Standard sizes)		- "XX.XX" = Assembled Length Assembled Length in INCHES (±.130") 2 inches minimum		Leave blank for -S and -D End Options. -N = Notch Polarization on socket (-T end only) (Not available with -04 position)	
		-S = Single End 				
		-D = Double End 				
		-T = Transfer End 				
		-RW = Reverse Wiring 				
		-D "XX" = Daisy Chain 				
		-R = Reverse 				
		-M = Middle Reverse 				
		-O = Outside Reverse 				
		-SR = Strain Relief 				



FFMD = Terminal Strip

