

L01 FLAT RIBBON CABLE

PITCH: 1.27mm

SPECIFICATIONS

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28AWG (7*0.127) Stranded Tinned Copper

#26AWG (7*0.16) Stranded Tinned Copper

Color : Grey With Red Edge

Electrical


Impedance : 115Ω (Unbalanced)

Capacitance : 12.2 pF/ft.

Inductance : .14uH/ft.

Propagation Delay : 1.4 ns/ft.

Insulation Resistance : 1GΩ/M min.

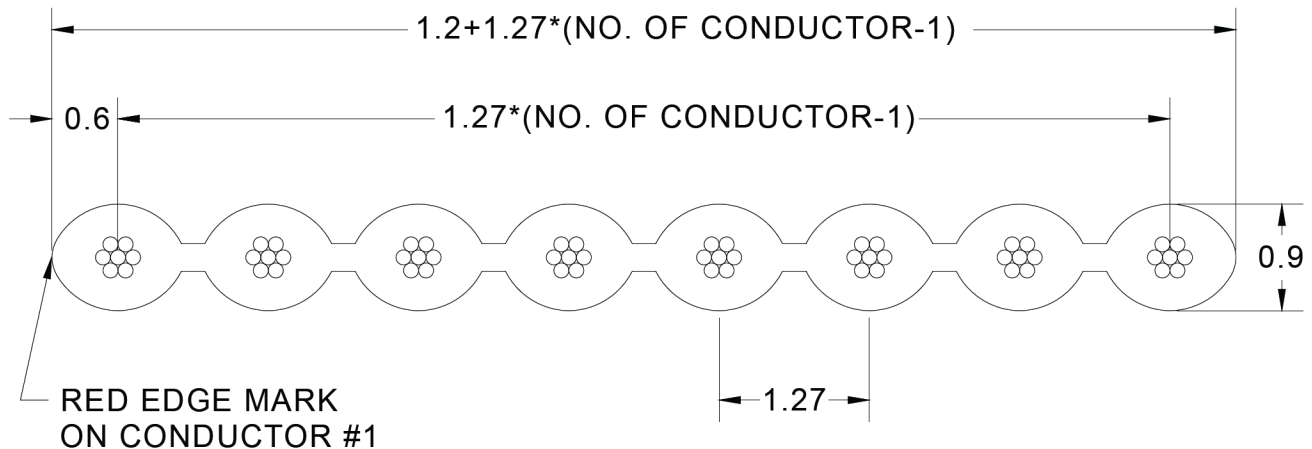

How to order:

L01-xx-P-yyyzz-G

xx = Number of Contacts 06 to 64

yyy = Length

zz = Measurement Unit (F=Feet, MM= Millimetre, MTR = Metre)