

L04a FLAT RIBBON CABLE

PITCH: 2.5mm & 2.54mm

SPECIFICATIONS


UL File No. : E162690
 UL Style : 2651
 Operating Temperature : -20°C to +105°C
 Flammability Rating : UL-VW-1
 Voltage Rating : 300V

Physical


Insulation Material : Polyvinyl Chloride (PVC)
 Conductor : #26 AWG Overcoated Stranded Tinned Copper
 #26 AWG Stranded Tinned Copper
 Color : Grey

Electrical


Impedance : 120Ω (Unbalanced)
 Capacitance : 11.2pF/ft.
 Inductance : .14 uH/ft.
 Propagation Delay : 1.35 ns/ft.
 Insulation Resistance : 1GΩ /M min.




TYPE A



TYPE B

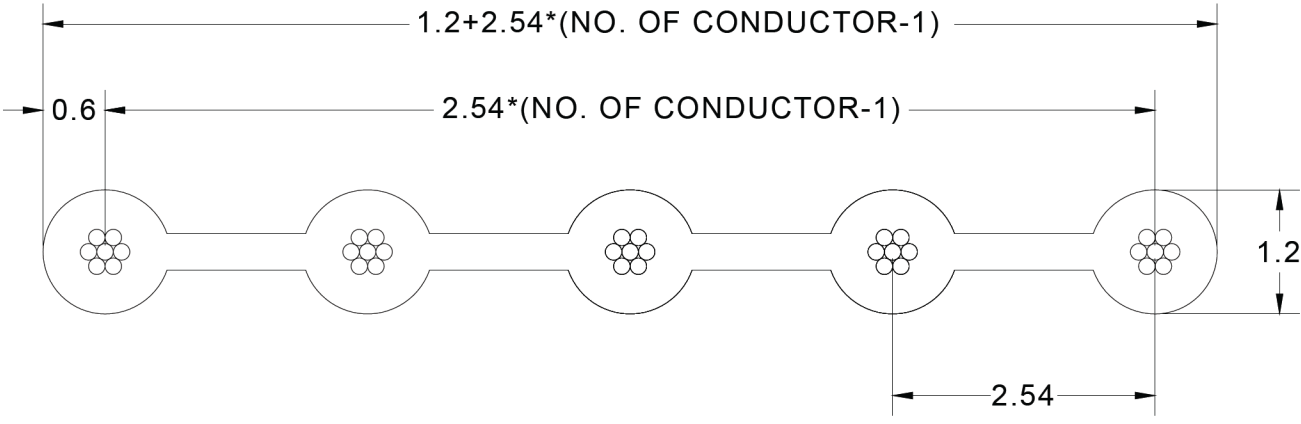

How to order: L04a - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.PITCH OPTION	4.WIRE SIZE
03 TO 24	P: PVC	A: 2.54mm B: 2.5mm	B: 26 AWG
5.CONDUCTOR OPTION	6.CABLE STYLE	7.CABLE LENGTH / UNIT	
A: OVERCOATED STRANDED TINNED COPPER B: STRANDED TINNED COPPER	A: TYPE A B: TYPE B	C: CM F: FEET I: INCH M: METER	