


(1,00 mm) .0394"

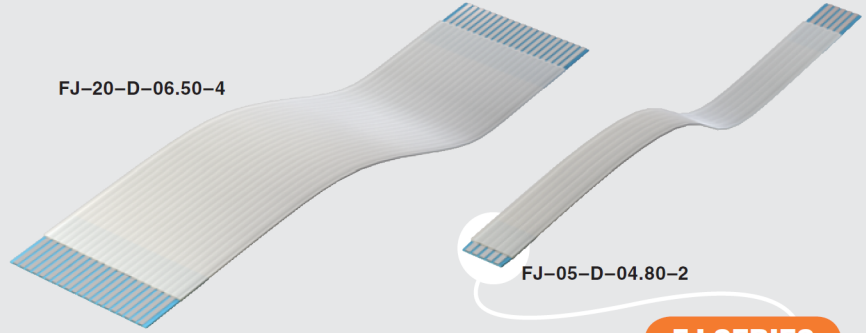





FJ SERIES

FLAT FLEXIBLE CABLE (FFC) JUMPER

SPECIFICATIONS

Mates with:
FC1, ZF1

- Conductor:**
Tin Plated Copper
- Conductor Resistance:**
300 Ω/km max
- Insulation Resistance:**
10 MΩ/km min
(conductor-to-conductor)
- Dielectric Test:**
400 VAC during 1 minute
(conductor-to-conductor)
- Temperature Rating:**
-30°C to +80°C
- Voltage Rating:**
300 VAC
- Flame Resistance:**
VW-1 (UL 758)
- RoHS Compliant:**
Yes

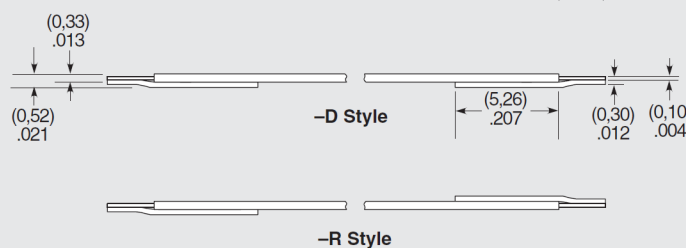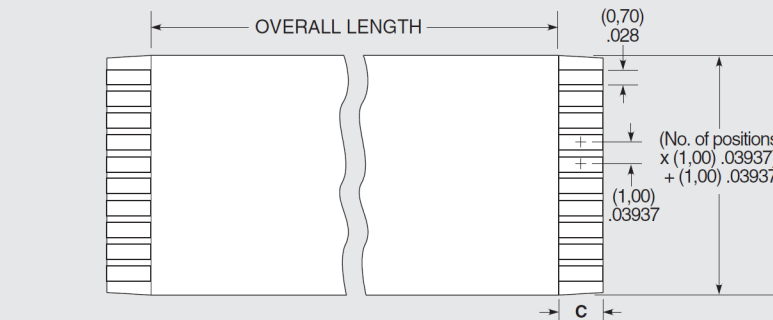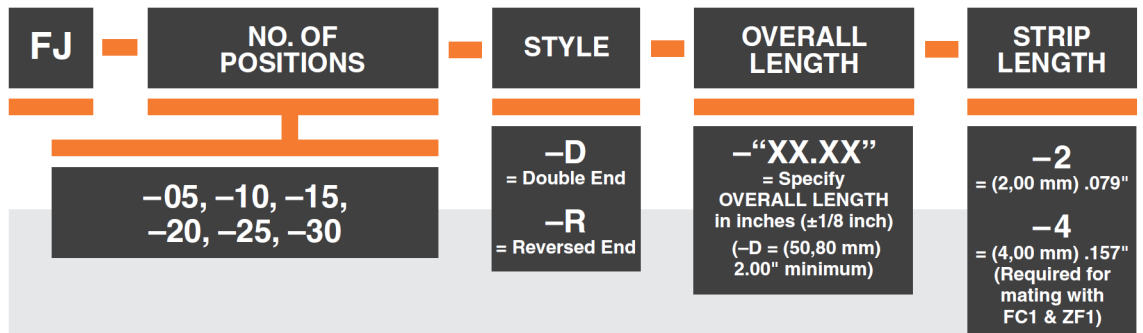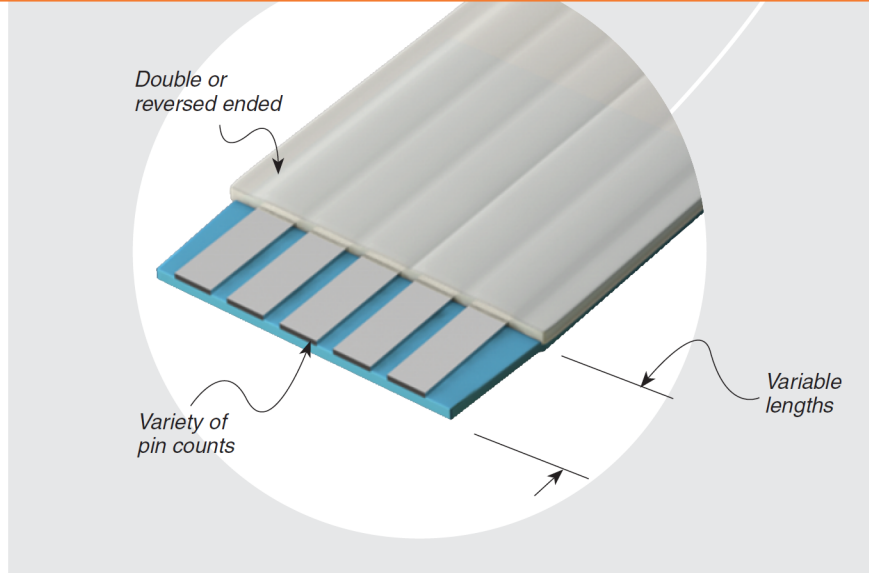

STRIP LENGTH	C
-2	(2,00) .079
-4	(4,00) .157

Note: Stiffener color will be blue or black at Samtec's discretion.

Note: Some sizes, styles and options are non-standard, non-returnable.