

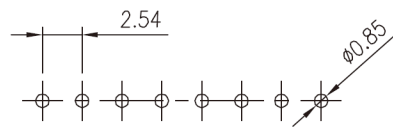




NOTE:

- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC. COLOR: BLACK.
CONTACT: COPPER ALLOY.
- 2.FINISH:
TERMINAL:
CONTACT AREA: TIN PLATING 100 μ " THICKNESS MIN.
SOLDERING AREA: TIN PLATING 100 μ " THICKNESS MIN.;
UNDER PLATING: NICKEL PLATING 50 μ " THICKNESS MIN. OVERALL.
- 3.PRODUCT SPECIFICATION: PS-FPC-11
- 4.PACKAGING SPECIFICATION: GFP63004002

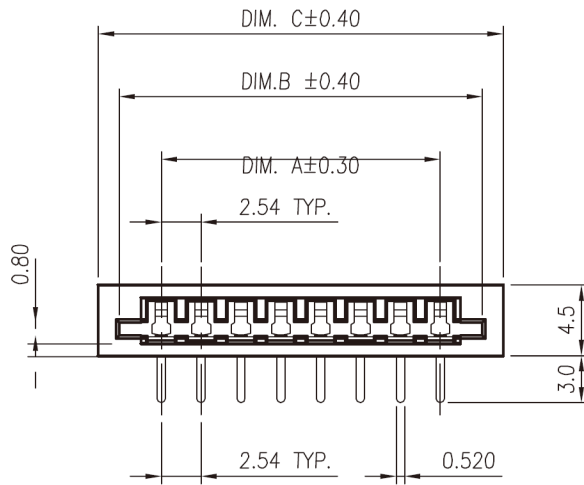

RECOMMENDED PCB LAYOUT
TOLERANCES: ±0.05

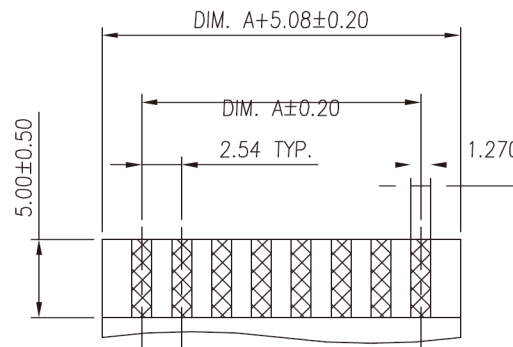

FPC/FFC T=0.30 ±0.05

■ DIMENSION TABLE

Pos.	Dimension			Pos.	Dimension C		
	A	B	C		A	B	C
	2.54	8.43	10.54	15	35.56	41.45	43.56
3	5.08	10.97	13.08	16	38.10	43.99	46.10
4	7.62	13.51	15.62	17	40.64	46.53	48.64
5	10.16	16.05	18.16	18	43.18	49.07	51.18
6	12.70	18.59	20.70	19	45.72	51.61	53.72
2	15.24	21.13	23.24	20	48.26	54.15	56.26
8	17.78	23.67	25.78	21	50.80	56.69	58.80
9	20.32	26.21	28.32	22	53.34	59.23	61.34
10	22.86	28.75	30.86	23	55.88	61.77	63.88
11	25.40	31.29	33.40	24	58.42	64.31	66.42
12	27.94	33.83	35.94	25	60.96	66.85	68.96
13	30.48	36.37	38.48	26	63.50	69.39	71.50
14	33.02	38.91	41.02				

RoHS Compliant

the vital component

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PJECTION



TOBY

THE VITAL COMPONENT

ORDER INFORMATION

SERIES VFPC R L 2 xx LF

DIP 90° LIF

03~26WAY DUAL CONTACT LEADFREE

DESCRIPTION: