


(5.08 mm) .200"

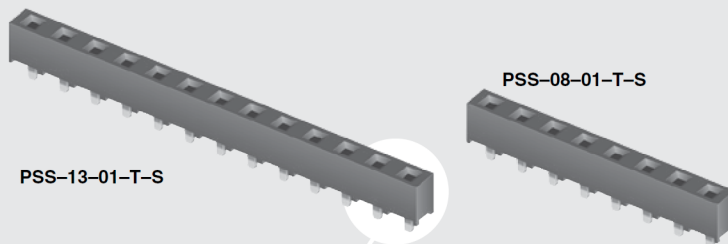

PSS SERIES

POWER SOCKET STRIP

SPECIFICATIONS


Insulator Material:
Black LCP
Contact Material:
BeCu
Plating:
Sn over 50 μ" (1.27 μm) Ni
Current Rating (PSS/FWS):
11.4 A per pin
(1 pin powered)
Insertion Depth:
(2.62 mm) .103" to
(5.03 mm) .198"
Voltage Rating:
500 VAC mated with FWS
RoHS Compliant:
Yes

Mates with:
FWS, HFWS,
SW, HPM, HPW

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.15 mm) .006" max (02-14)
(0.20 mm) .008" max (15-20)

RECOGNITIONS

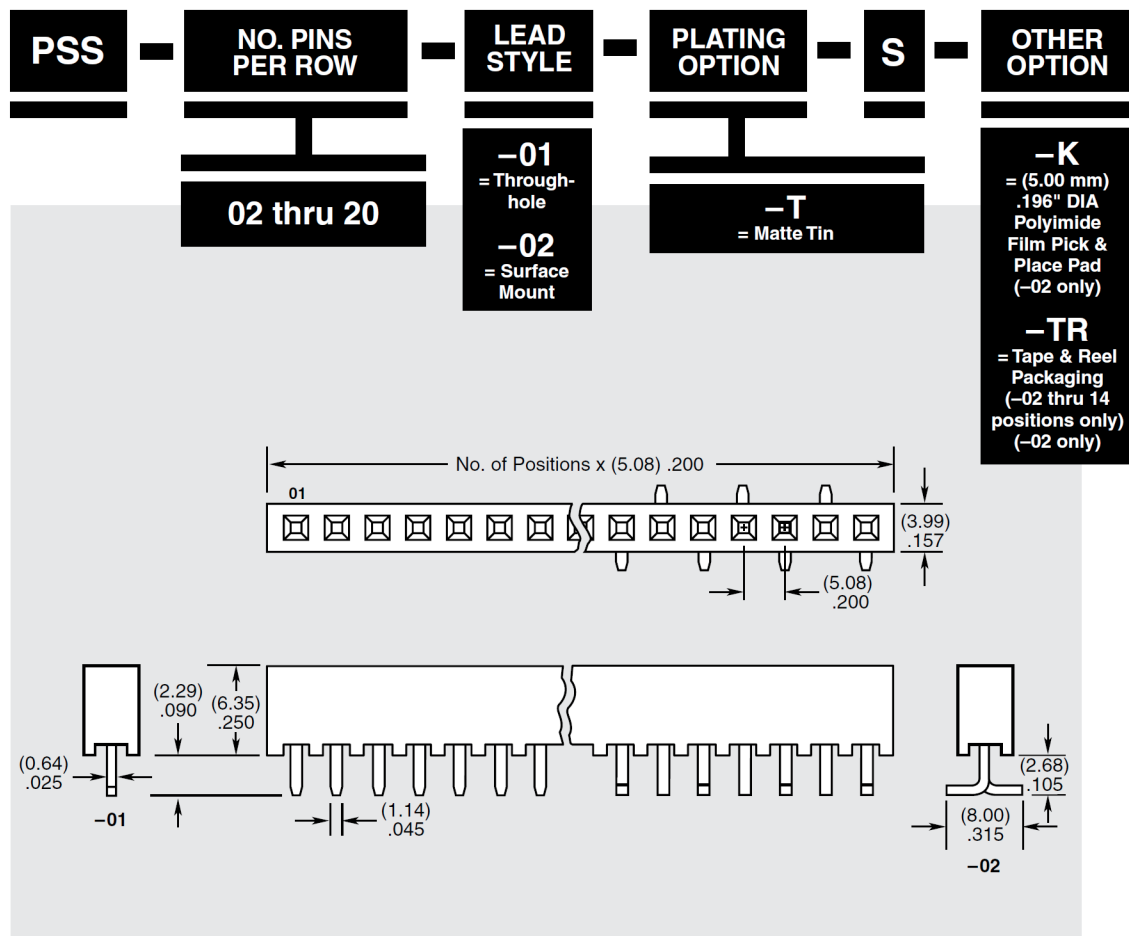

Note: Some lengths, styles and options are non-standard, non-returnable.