samtec

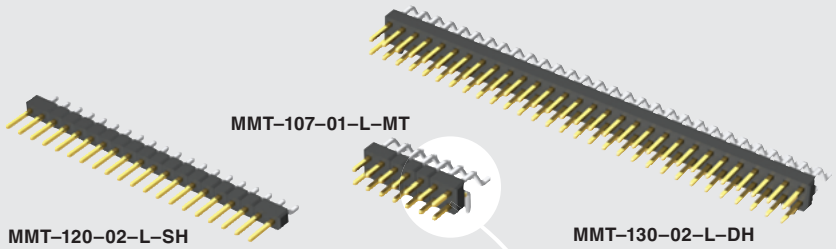

(2,00 mm) .0787"

MMT SERIES

HORIZONTAL SURFACE MOUNT HEADER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MMT

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Au or Sn over
50µ" (1,27 µm) Ni
Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold
RoHS Compliant:
Yes

Processing:

Lead–Free Solderable:
Yes
SMT Lead Coplanarity:
(0,10 mm) .004" max (02-25)
(0,15 mm) .006" max (26-36)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

FILE NO. E111594

Mates with:
CLT, SQT, SQW, ESQT, TLE, SMM, MMS, TCSD

APPLICATIONS



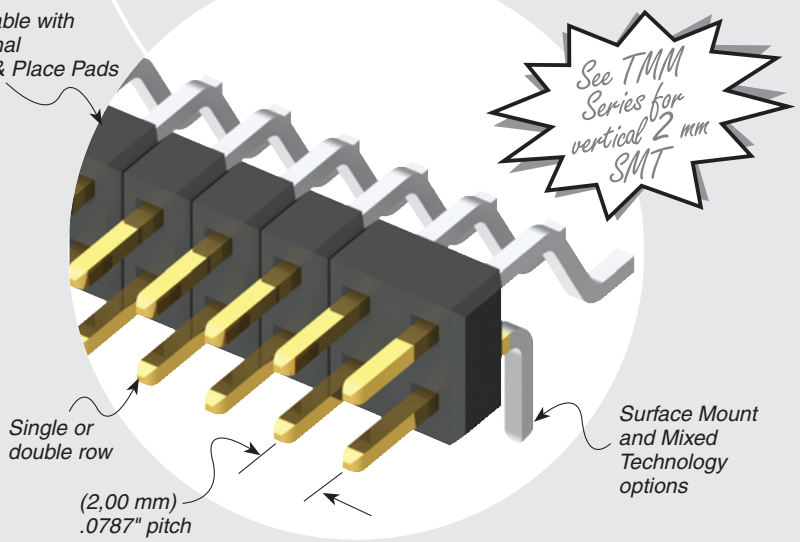

ALSO AVAILABLE (MOQ Required)

- Alignment pins
- Locking clips
- Molded pick & place pads
- Other platings

Contact Samtec.

TAPE & REEL AVAILABILITY

No tooling charges.
Minimum order is the lesser of a full reel quantity or 125 pieces.
Order any quantity above minimum.
In-house design, manufacture.
Quick turn-around.
Call Samtec for specifications and ordering information.

Note: Some lengths, styles and options are non-standard, non-returnable.
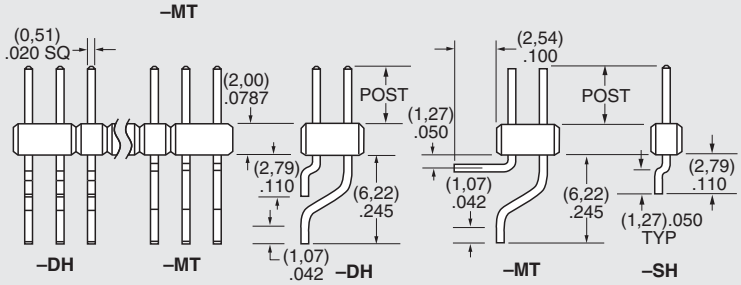
MMT	–	1	NO. PINS PER ROW	–	LEAD STYLE	–	PLATING OPTION	–	ROW OPTION	–	OPTION
			02 thru 36		–01 = (3,20 mm) .126" post –02 = (4,45 mm) .175" post		–F = Gold flash on post, Matte Tin on tail –L = 10µ" (0,25 µm) Gold post, Matte Tin on tail –T = Matte Tin		–SH = Single Row –DH = Double Row –MT = Double Row Mixed Technology		–K = (4,00 mm) .157" DIA Polyimide Film Pick & Place Pad (3 positions minimum) –P = Pick & Place Pad (2 positions minimum) –"XXX" = Polarized Position Specify position of omitted pin –TR = Tape & Reel Packaging