


**SPECIFICATIONS**

Current Rating: 3 Amp  
 Voltage Rating: 250V  
 Insulator resistance: 5000 MΩ Min.  
 Contact Resistance: 20 mΩ Max.  
 Dielectric withstanding: AC 1000V/minute  
 Operating Temperature: -40° ~ +75°C

Contact Material: Brass  
 Insulator Material: Nylon-6T UL94V-0  
 Color: Natural  
 Finish: Tin plated

Cir-cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32

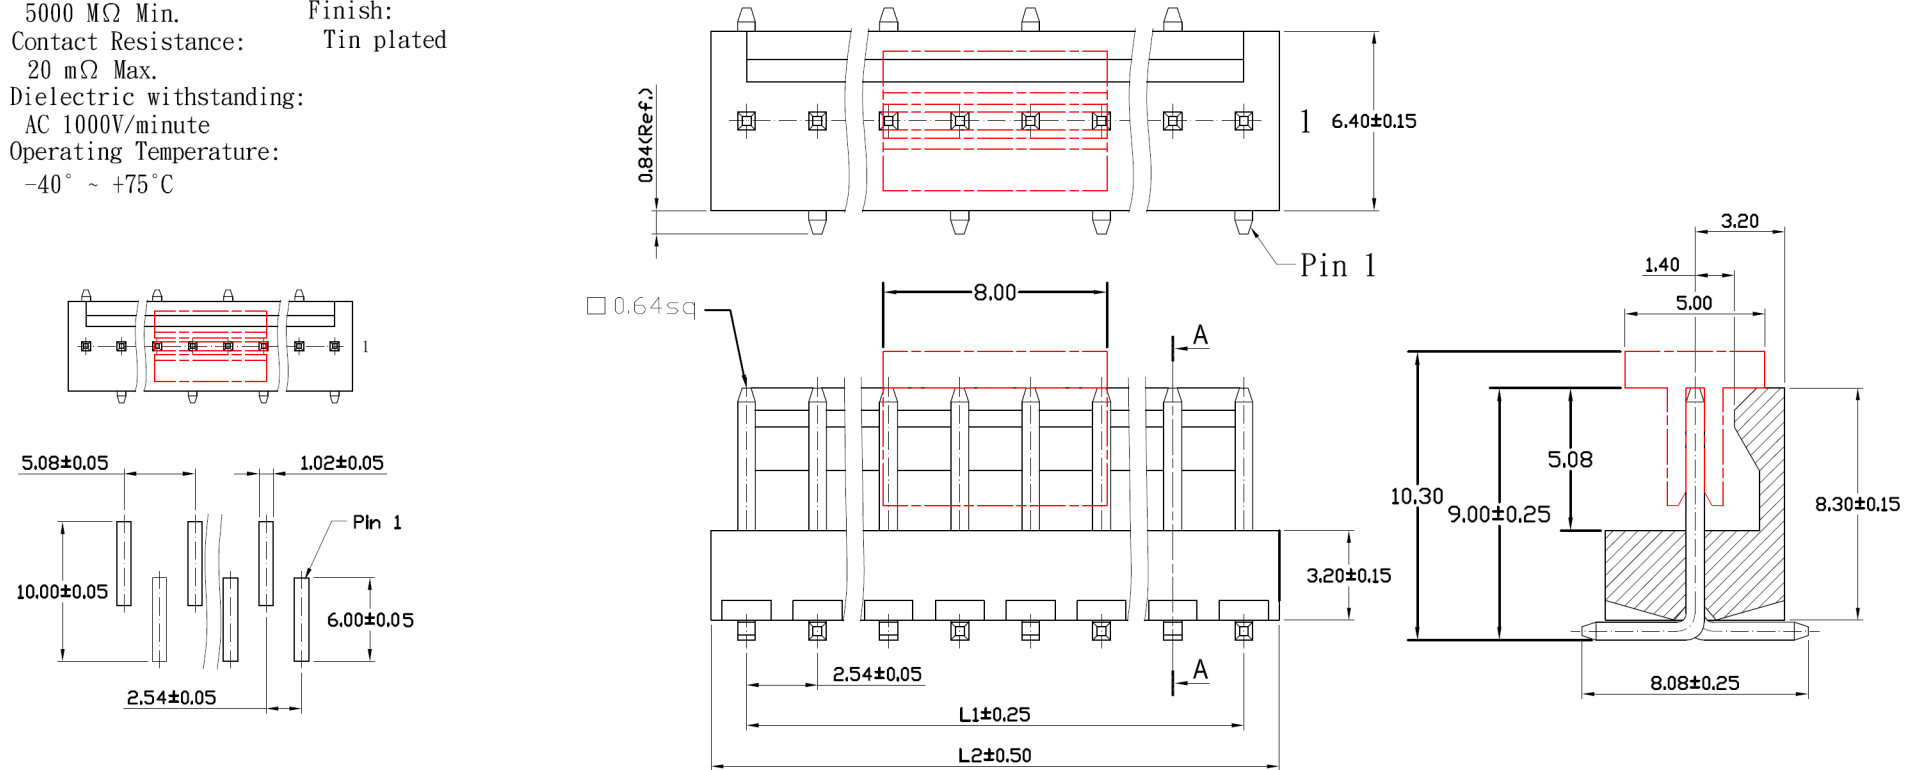

RECOMMENDED P. C. B. LAYOUT


**RoHS Compliant**

the vital component

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PPROJECTION

TOLERANCES ARE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



**ORDER INFORMATION**

AM254xxS-SMT  
 1  
 Option 1 xx = Total number of positions 02 to 08

Please note: Some sizes are non-standard, non-returnable and may be subject to minimum order quantities (MOQ)



DESCRIPTION: