


# LOW-PROFILE DUAL WIPE SOCKET

(1.27 mm) .050" PITCH • CLP SERIES

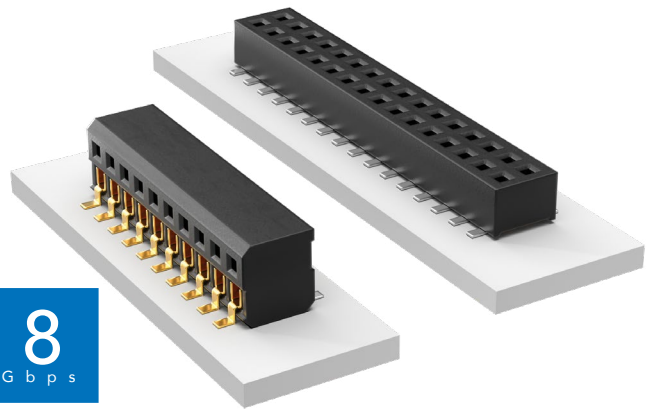

## CLP

Mates:

FTSH, FTS, FW

**TIGER™  
CLAW**  
CONTACT

## SPECIFICATIONS

### Insulator Material:

Black Liquid Crystal Polymer

### Contact Material:

Phosphor Bronze

### Plating:

Sn or Au over

50 μ" (1.27 μm) Ni

### Current Rating (CLP/FTSH):

3.4 A per pin

(2 pins powered)

### Voltage Rating:

280 VAC/395 VDC

### Operating Temp Range:

-55 °C to +125 °C

### Insertion Depth:

Top Entry =

(1.40 mm) .055" minimum

Bottom Entry =

(2.41 mm) .095" minimum

plus board thickness

DH Entry =

(2.31 mm) .091" to (2.67 mm) .105"

### Normal Force:

60 grams (0.59 N) average

### Max Cycles:

100 with 10 μ" (0.25 μm) Au

## PROCESSING

### Lead-Free Solderable:

Yes

### SMT Lead Coplanarity:

(0.10 mm) .004" max (02-35)

(0.15 mm) .006" max (36-50)\*

\*(.004" stencil solution

may be available)

## ALSO AVAILABLE

MOQ Required

Single row

Other platings



| CLP | 1 | NO. PINS PER ROW | 02 | PLATING OPTION | ROW OPTION | OTHER OPTIONS |
|-----|---|------------------|----|----------------|------------|---------------|
|-----|---|------------------|----|----------------|------------|---------------|

02 thru 50

**-F**  
= Gold flash on contact, Matte Tin on tail

**-L**  
= 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail

**-G**  
= 10 μ" (0.25 μm) Gold (-D only)

**-D**  
= Double Row

**-DH**  
= Double Horizontal (Requires FTSH-04 lead style)

**-BE**  
= Bottom Entry (Required for bottom entry applications)

**-A**  
= Alignment Pin (Not available with -PA option) (05, 06, 07, 08, 10, 12, 15, 20, 25, 30, 40 positions only) (-DH option and other sizes. Contact Samtec.)


**-K**  
= (4.00 mm) .157" DIA Polyimide film Pick & Place Pad (5 positions minimum)

**-P**  
= Pick & Place Pad (5 positions min. -D only) (Not always necessary for auto placement. See Flex Processing.)


**-PA**  
= Pick & Place Pad with Alignment Pin (-D only) (Not available with -A option)

**-TR**  
= Tape & Reel


**-FR**  
= Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

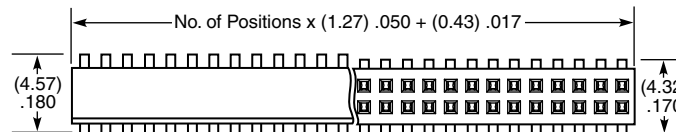

| PIN/ROW | A           |
|---------|-------------|
| 04-15   | (3.56) .140 |
| 16-50   | (7.11) .280 |



If odd pins/row, alignment pins are on middle position on centerline of the part.  
If even pins/row, then alignment pins are between middle two positions.



-PA OPTION



-P OPTION

## Note:

Some lengths, styles and options are non-standard, non-returnable.