


SMA TO 18 GHz

SMA Cable Assemblies

RF25S, RF402, RF405, RF180, RF280



VSWR

RF25S: 1.60 max.
 RF402: 1.50 max.
 RF405: 1.35 max.
 RF180: 1.35 max.
 RF280: 1.35 max.

SERIES	END 1 CONNECTOR	END 2 CONNECTOR	OVERALL LENGTH
RF25S = MWC-2550-01 microwave cable with 25 AWG solid FEP dielectric	-01SP1* = SMA Straight Plug		-“XXXX” = Overall Length in millimeters
RF402 = RG 402 (.141”) 19 AWG semi-flexible microwave cable	-01RP1* = SMA Right-angle Plug (RF25S not available)		-0100 (100 mm) 3.94” minimum
RF405 = RG 405 (.086”) 24 AWG semi-flexible microwave cable	-01BJ1* = SMA Bulkhead Jack (RF402 & RF405 not available)		
RF180 = (4.52 mm) .178” overshield DIA, 16 AWG microwave cable	*Remove last “1” from end connector when specifying RF180 & RF280.		
RF280 = (7 mm) .277” overshield DIA, 11 AWG microwave cable			

ALSO AVAILABLE

SMP = RF25S, RF405
 TNCA, N Type = RF180
 TNCA, N Type = RF280


SMA Cable Connectors

PRF01



CONNECTORS FOR INDUSTRY STANDARD CABLES	
PRF01-P-C-EP-120B-SS	IW 1201, low loss flexible
PRF01-P-C-EP-120-SS	Harbour LL120, low loss flexible
PRF01-P-C-EP-142-SS	Harbour LL142, low loss flexible
PRF01-P-C-EP-190-SS	Semflex HP190, low loss flexible
PRF01-P-C-EP-335-SS	Harbour LL335, low loss flexible
PRF01-P-C-EP-290-SS	Semflex LA290, low loss flexible
PRF01-P-C-EP-142A-SS	Harbour SB142, low loss flexible
PRF01-P-C-EP-142-RS	Harbour LL142, low loss flexible
PRF01-P-C-EP-190-RS	Semflex HP190, low loss flexible
PRF01-J-C-EP-142-SS	Harbour LL142, low loss flexible
PRF01-P-C-EP-141A-SS	Harbour SS402, flexible alternative to RG 402
PRF01-P-C-EP-160-RS	Semflex HP160, low loss flexible
PRF01-P-C-EP-305-SS	Semflex HP305, low loss flexible
PRF01-P-C-EP-335A-SS	Harbour LL335i, low loss flexible
PRF01-P-C-EE-402-SD	RG 402, .141, semi-rigid
PRF01-P-C-EP-150-SS	Dynawave DF150, low loss flexible
PRF01-J-C-EE-405-SD	RG 405, .085, semi-rigid
PRF01-P-C-EE-047D-SD	.047, semi-rigid
PRF01-J-C-EE-047D-4D	.047, semi-rigid
PRF01-J-C-EE-047D-SD	.047, semi-rigid
PRF01-P-C-EP-160-SS	Semflex HP160, low loss flexible
PRF01-P-C-EE-405-SD	RG 405, .085, semi-rigid
PRF01-P-C-EP-200-SS	Times Max Gain 200, low loss flexible

INTERFACE STANDARD

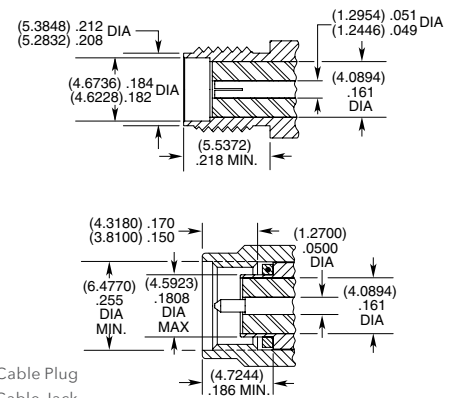

P-C = Cable Plug
 J-C = Cable Jack
 EE = Plating (50 μ" Gold center contact & outer contact)
 EP = Plating (50 μ" Gold center contact, passivated outer contact)
 SS = Straight, Solder Clamp
 SD = Straight, Direct Solder
 RS = Right-angle, Solder Clamp
 4D = 4-hole flange, Direct Solder

SMA Board Connectors

SMA-TH, SMA-SM, SMA-MT, SMA-EM

Cable Mates:
 RF25S, RF402, RF405, RF180, RF280



SMA	GENDER	TYPE	PLATING	ORIENTATION	TERMINATION
	-J = Jack	-P = PCB Mount	-H = 30 μ" (0.76 μm) Gold center contact, 3 μ" (0.08 μm) Gold outer contact	-ST = Straight	-TH1 = Through-hole
			-GF = 10 μ" (0.25 μm) Gold center contact, 3 μ" (0.08 μm) Gold outer contact (-SM1 only)	-RA = Right-angle	-SM1 = Surface Mount (-GF-RA only)
					-EM1 = Edge Mount (-ST only)
					-EM3 = Drop-in Edge Mount (-ST only)
					-MT1 = Mixed Technology (-ST only)

